

High Performance Sorting Systems

Components Catalogue



209 roller conveyor, accessory parts



RB.KP500VAX

roller conveyor , swivelling part , width 500 mm , with center-pin and

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

Power transmission by mechanic coupling with center-pin roller conveyor. The rollers are driven by round belts from the center pin.

power supply

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 500mm(1,6ft)
length: 600mm(2ft) up to 1275mm(4,2ft).

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

Depending of driving conveyor.

additional features

Balance realized withgas-pressure spring.



RB.KP800VAX

roller conveyor , swivelling part , width 800 mm , with center-pin and

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

Power transmission by mechanic coupling with center-pin roller conveyor. The rollers are driven by round belts from the center pin.

power supply

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 800mm(2,6ft)
length: 600mm(2ft) up to 1275mm(4,2ft).

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

Depending of driving conveyor.

additional features

Balance realized with gas-pressure spring. Other conveyor-widths project-related or on request possible.



RB.KP800N

roller conveyor , swivelling part , width = 800 mm , not driven

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachement of accessories.

drive

power supply

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 800mm(2,6ft)
length: 600mm(2ft) up to 1275mm(4,2ft).

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Balance realized with gas-pressure spring



RB.KP1000VAX

roller conveyor , swivelling part , width = 1000 mm , with center-pin and

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachment of accessories.

drive

Power transmission by mechanic coupling with center-pin roller conveyor. The rollers are driven by round belts from the center pin.

power supply

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 1000mm(3,3ft)
length: 600mm(2ft) up to 1275mm(4,2ft).

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

Depending of driving conveyor.

additional features

Balance realized with gas-pressure spring. Other conveyor-widths project-related or on request possible.



RB.KP1000N

roller conveyor , swivelling part , width = 1000 mm , not driven

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachement of accessories.

drive

power supply

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 1000mm(3,3ft)
length: 600mm(2ft) up to 1275mm(4,2ft).

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets.

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

additional features

Balance realized with gas-pressure spring. Other conveyor-widths project-related or on request possible.



RB.St

roller conveyor , accessories for conveyor

conveying medium

field of application

Cargo handling with individual weights up to 50kg(110lbs).

maintenance

All part are performed for easy maintenace and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strenght 4mm, system hole pattern for flexible attachement of accessories.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

drive

Pneumatic cylinder

speed and performance

power supply


oil free compressed air, 6bar

additional features

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: variabel

Your way to COMSORT

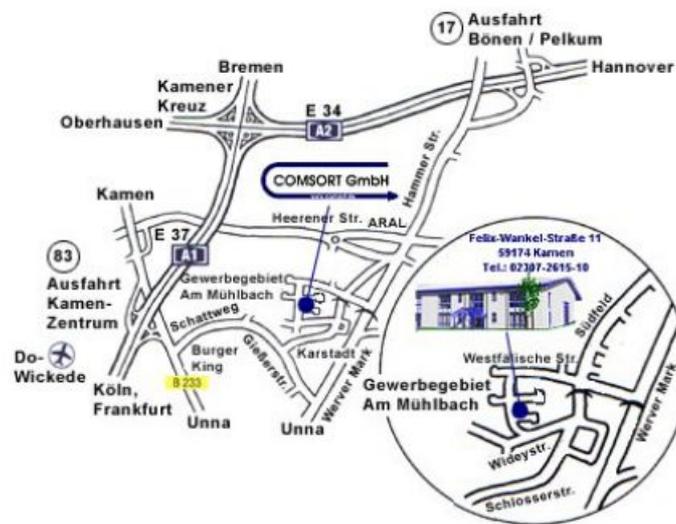

COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de