


High Performance Sorting Systems

Components Catalogue



290 Linemaster

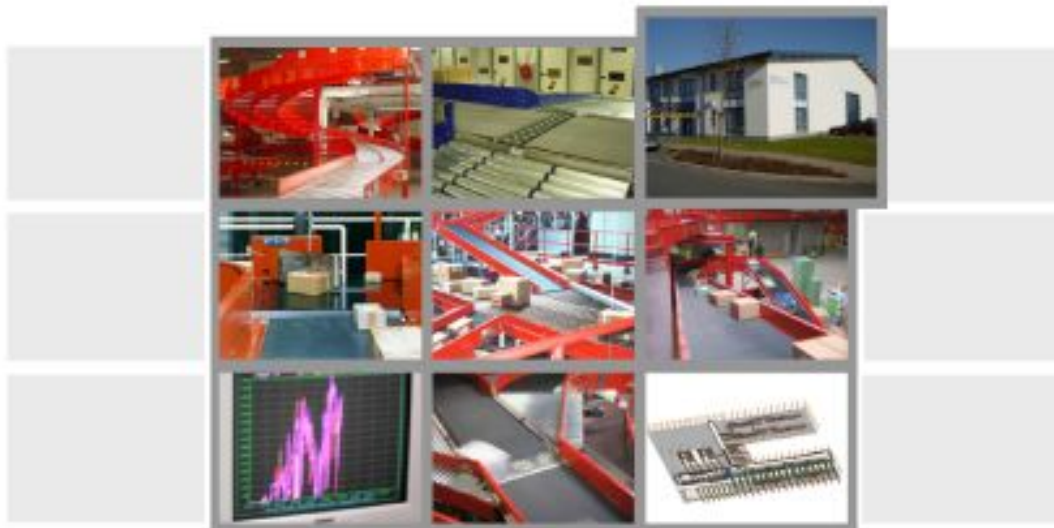

... Bilder nach dem Foto verfügbar
Unfortunately all no photo available

Linemaster I-Form re.10

System modules , linemaster

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strength 4mm, system hole pattern for flexible attachment of accessories. Belt support phenol-coated for noise reduction. For segment-belt conveyors, support of heavy duty plastic.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Return rollers with sealed bearings. Belt pulleys with high performance brand-name self aligning roller bearings. Motorized pulleys.

power supply

power supply: 4 x 1,5kW; 15 x 0,75kW; 2 x 0,55kW; 2 x 0,37kW

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 2000mm(6,6ft)
length: 19500mm(64ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets. Endless welded high performance conveyor belt.

maintenance

All part are performed for easy maintenance and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.

speed and performance

speed: 2m/s(394ft/min) capacity: 7500P/h

additional features

Other conveyor-widths project-related or on request possible.
Please use our special Linemaster brochure to.



... Bilder nach dem Foto verfügbar
Unfortunately all no photo available

Linemaster I-Form li.10

System modules , linemaster

field of application

Cargo handling with individual weights up to 50kg(110lbs).

frame

Construction of pulver-coated CS-Profiles, standard lengths and accessories galvanized, material strength 4mm, system hole pattern for flexible attachment of accessories. Belt support phenol-coated for noise reduction. For segment-belt conveyors, support of heavy duty plastic.

drive

Power transmission by noise reduced brand-name serrated belt, with sophisticated set of pulleys for minimum number of variants on motors and drive parts. Return rollers with sealed bearings. Belt pulleys with high performance brand-name self aligning roller bearings. Motorized pulleys.

power supply

power supply: 4 x 1,5kW; 15 x 0,75kW; 2 x 0,55kW; 2 x 0,37kW

geometric dimensions

min. conveying level over ground: 400mm(1,3ft)
net width: 2000mm(6,6ft)
length: 19500mm(64ft)

conveying medium

Rollers made of galvanized steel, with sealed ball bearings in noise reduced brackets. Endless welded high performance conveyor belt.

maintenance

All part are performed for easy maintenance and long lifecycle. All bearings are lifecycle lubricated. Geared motors are free of maintenace and filled with high performance synthetic oil. Therefore you have only a minimum of maintenace and sparepart cost.

accessories

All conveyors and components are performed for the use with a wide range of accessories. Accessories are, only excerpts, supports, side guides, light barriers, scanners, roller guides, and many parts more.


speed and performance

speed: 2,0m/s(394ft/min) capacity: 7500P/h

additional features

Other conveyor-widths project-related or on request possible.
Please use our special linemaster brochure to.

Your way to COMSORT

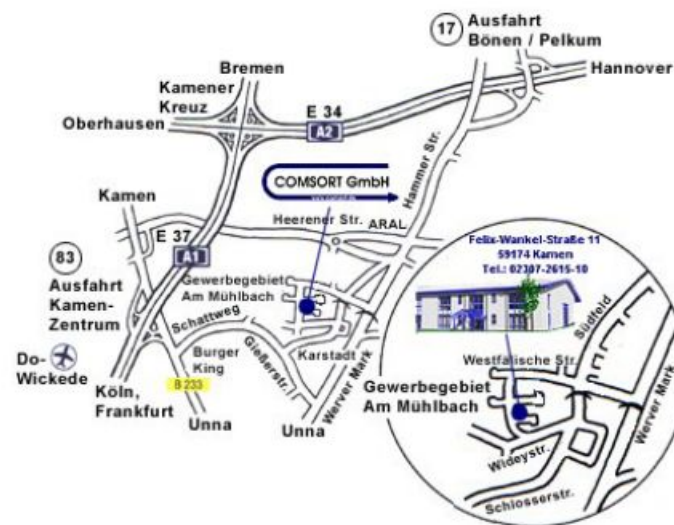

COMSORT GmbH

www.comsort.de



COMSORT GMBH
FELIX-WANKEL-STR. 11
D- 59174 KAMEN



FON : +49 (0) 2307 / 2615-10
FAX : +49 (0) 2307 / 2615-20
Email : info@COMSORT.de